



## Kawasaki TERYX® H2 Cup Holder Mount for PCI Race Radios Trax Plus Intercom & 4 Rocker Switches




Required Tools	
Drill	1" Drill/Step Bit

Parts Included	
Self-Tapping Phillips Screw (4)	Rocker Switch Cap (4)

### Installation:

1. Drill a 1" hole into the cupholder and cubby. Run the Intercom harnesses into the cubby and the rocker switch wires to the cupholder.

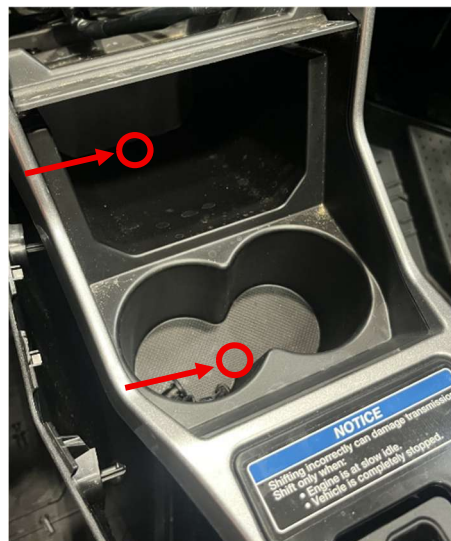

2. Mount the PCI Trax Intercom to the Cup Holder Mount using their supplied screws. Mount any rocker switches or place the rocker switch caps in the cutouts.



3. Connect the PCI Trax Intercom harnesses. Connect any Rocker Switch harnesses.

4. Mount the Cup Holder Mount to the vehicle using the supplied Self-Tapping Phillips Screws (4) and a drill. Put the **drill motor to the lowest torque setting** and screw the mount to the dash.

