



Kawasaki TERYX® H2 Cup Holder Mount for Rugged Radios STX Intercom & 4 Rocker Switches




| Required Tools | |
|----------------|-------------------|
| Drill | 1" Drill/Step Bit |

| Parts Included | |
|---------------------------------|-----------------------|
| Self-Tapping Phillips Screw (4) | Rocker Switch Cap (4) |

Installation:

1. Drill a 1" hole into the cupholder and cubby. Run the Intercom harnesses into the cubby and the rocker switch wires to the cupholder.

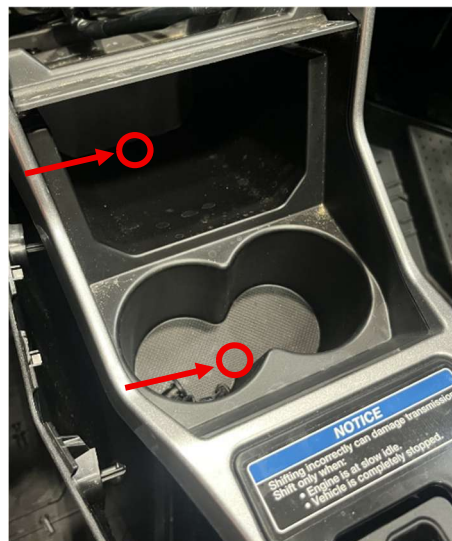

2. Mount the Rugged Radios STX Intercom to the Cup Holder Mount using their supplied screws. Mount any rocker switches or place the rocker switch caps in the cutouts.



3. Connect the Rugged Radios STX Intercom harnesses. Connect any Rocker Switch harnesses.

4. Mount the Cup Holder Mount to the vehicle using the supplied Self-Tapping Phillips Screws (4) and a drill. Put the **drill motor to the lowest torque setting** and screw the mount to the dash.

